


# ENERSYL® HT INSTRUM

## Instrumentation cables

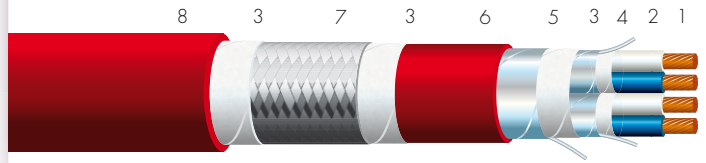

- 1 • Stranded bare copper core, class 2 as per IEC 60228.
- 2 • Insulation: silicone rubber as per NF C 32-090 + optional filler(s).
- 3 • Optional separating tape.
- 4 • (optional) Individual electrical screen (EI): aluminium/PET tape + continuity wire.
- 5 • General electrical screen: aluminium/PET tape + continuity wire (EG) / tin-plated copper braid (BE) / bare copper braid (BR).
- 6 • (optional) Internal sheath: silicone rubber.
- 7 • (optional) Armour: galvanized steel braid (BG).
- 8 • Outer sheath: silicone rubber.

### Reference

- (example) ENERSYL® HT EI BG INSTRUM 2P1,5 mm<sup>2</sup>  
HT: high temperature  
EI, EG, BE, BR: type of electrical screen  
BG: type of armour  
INSTRUM: instrumentation cable  
2 : number of pairs, triples or quads  
P,T,Q: pairs, triples or quads  
1.5 mm<sup>2</sup>: cross-section in mm<sup>2</sup>

### Approvals - standards

- IEC 60228 / NF C 32-090.
- IEC 60332-1 / IEC 60332-3 / NF C 32-070 test C1.
- IEC 60331-21 / NF EN 50200.
- IEC 61034-2 / IEC 60754-1 / IEC 60754-2.

### Markings

- OMERIN – ENERSYL < HT xx xx INSTRUM >  
< cross-section > – 300/500V – < batch > – < year >

### Standard products

- Sheath: brick red.
- Colour identification of conductors:  
> Pair: white and blue numbered.  
> Triple: white, red and blue numbered.  
> Quad: white, black, red and blue numbered.

### Technical characteristics

#### Thermal

- Continuous operating temperature: -60 °C to +200 °C.

#### Electrical

- Rated voltage: 300/500 V.
- Test voltage: 2000 V.

#### Smoke - fire

- Flame retardant – cable alone:  
IEC 60332-1-2 / NF EN 60332-1-2 / NF C 32-070 test C2.
- Flame retardant – bunched cable:  
IEC 60332-3-22 cat. A / NF EN 60332-3-22 cat. A.
- Fire retardant: NF C 32-070 test C1.
- Fire resistant: IEC 60331-21 / NF EN 50200.
- Low smoke density: IEC 61034-2 / NF EN 61034-2.
- Halogen-free: IEC 60754-1 / NF EN 60754-1.
- Low corrosivity of gas emissions: IEC 60754-2 / NF EN 60754-2.

#### Resistance of outer sheath to chemical attacks as per OMERIN test report NT140102-01:

- Good resistance to acid.
- Fairly good resistance to base.
- Good resistance to IRM 902 mineral oil.
- Good resistance to aliphatic hydrocarbons.
- Resistance to water: type AD7 as per IEC 60529 without immersion of ends.
- Resistance to UV ≥ 2000 hours as per EN 16472.

### Options

- FLEX: flexible tin-plated copper core, class 5 as per IEC 60228. (0.9 mm<sup>2</sup> cross-section replaced by 1 mm<sup>2</sup>).
- Other colours: contact us.
- ATEX as per EN 60079-14.  
Particularly suited for static facilities in potentially explosive environments with "i" intrinsic safety protection mode, requiring specific identification of cables.  
Colour of the sheath: blue as per EN 60079-14 part 12.2.2.6.  
> ENERSYL® HT EI BE EX INSTRUM:  
with individual electrical screen (aluminium/PET tape) and general (tin-plated copper braid).  
> ENERSYL® HT EI EX INSTRUM:  
with individual and general electrical screen (aluminium/PET tape).  
> ENERSYL® HT BE EX INSTRUM:  
with general electrical screen (tin-plated copper braid).  
> ENERSYL® HT EG EX INSTRUM:  
with general electrical screen (aluminium/PET tape).

For this product, please contact:



**SEVI KABEL**

VIA DEI MARINAI D'ITALIA, 1 - 10034 CHIVASSO (TO) - Tel. 011.910.11.12 / 011.910.67.78 - Fax 011.913.13.13 - info@sevikabel.it

Number of pairs, triples or quads	Nominal cross-section (mm <sup>2</sup> )	Nominal stranding	Maximum linear resistance at 20 °C (Ω/km)	Nominal thickness of insulation (mm)	Nominal diameter of conductors (mm)	NON-SHIELDED CABLES Nominal outside diameter* (mm)						ARMoured CABLES Nominal outside diameter* (mm)					
						Pairs		Triples		Quads		Pairs		Triples		Quads	
						EG	EI	EG	EI	EG	EI	EG	EI	EG	EI	EG	EI
1	0.5	7 / 0.30	36.0	0.6	2.1	6.0		6.4		7.5		9.4		11.5			
2**	0.5	7 / 0.30	36.0	0.6	2.1	7.3	10.0	11.5	12.3	12.8	13.8	11.2	14.1	15.6	16.5	17.0	18.0
3	0.5	7 / 0.30	36.0	0.6	2.1	10.0	11.1	12.1	12.8	13.8	14.9	14.1	15.2	16.2	17.0	18.2	19.4
4	0.5	7 / 0.30	36.0	0.6	2.1	11.4	12.0	13.2	13.9	15.0	16.2	15.5	16.1	17.3	18.1	19.5	20.8
5	0.5	7 / 0.30	36.0	0.6	2.1	12.4	13.0	14.6	15.4	16.4	17.7	16.5	17.1	19.0	20.0	21.4	22.8
6	0.5	7 / 0.30	36.0	0.6	2.1	13.4	14.3	15.8	16.7	18.0	19.6	17.5	18.7	20.3	21.3	23.1	24.6
7	0.5	7 / 0.30	36.0	0.6	2.1	13.4	14.3	15.8	16.7	18.0	19.6	17.5	18.7	20.3	21.3	23.1	24.6
8	0.5	7 / 0.30	36.0	0.6	2.1	15.2	16.0	17.6	19.0			19.7	20.5	22.6	24.0		
9	0.5	7 / 0.30	36.0	0.6	2.1	16.4	17.2	19.4	20.5			20.9	22.2	24.3	26.0		
12	0.5	7 / 0.30	36.0	0.6	2.1	17.6	18.9	20.8	22.5			22.6	23.8	26.2	28.3		
19	0.5	7 / 0.30	36.0	0.6	2.1	20.8	22.3	24.7	26.6			26.2	28.1	30.8	32.8		
24	0.5	7 / 0.30	36.0	0.6	2.1	24.7	26.4					30.8	32.5				
37	0.5	7 / 0.30	36.0	0.6	2.1	28.9	30.8					35.5	37.4				
1	0.9	7 / 0.40	20.6	0.6	2.4	7.0		7.5		8.2		10.9		11.4		12.2	
2**	0.9	7 / 0.40	20.6	0.6	2.4	8.0	11.5	12.7	13.9	14.2	15.5	11.9	15.6	16.8	18.1	18.5	20.1
3	0.9	7 / 0.40	20.6	0.6	2.4	11.6	12.1	13.4	14.3	15.1	16.4	15.7	16.2	17.5	18.8	19.5	21.1
4	0.9	7 / 0.40	20.6	0.6	2.4	12.6	13.2	14.8	15.5	16.6	17.9	16.7	17.3	19.2	20.2	21.3	23.0
5	0.9	7 / 0.40	20.6	0.6	2.4	13.7	14.6	16.1	16.9	18.3	20.0	17.8	19.0	20.7	22.0	23.0	25.4
6	0.9	7 / 0.40	20.6	0.6	2.4	15.1	15.8	17.5	18.7	19.9	22.2	19.7	20.4	22.5	23.8	25.0	27.6
7	0.9	7 / 0.40	20.6	0.6	2.4	15.1	15.8	17.5	18.7	19.9	22.2	19.7	20.4	22.5	23.8	25.0	27.6
8	0.9	7 / 0.40	20.6	0.6	2.4	16.9	17.7	19.9	21.0			21.8	22.6	25.3	26.4		
9	0.9	7 / 0.40	20.6	0.6	2.4	18.6	19.4	22.0	23.1			23.5	24.4	27.3	29.0		
12	0.9	7 / 0.40	20.6	0.6	2.4	20.0	20.9	23.7	25.3			25.3	26.3	29.4	31.6		
19	0.9	7 / 0.40	20.6	0.6	2.4	23.7	24.8	28.4	30.3			29.4	30.9	34.6	37.0		
24	0.9	7 / 0.40	20.6	0.6	2.4	28.4	30.1					34.6	36.7				
37	0.9	7 / 0.40	20.6	0.6	2.4	32.8	34.7					39.3	41.6				
1	1.5	7 / 0.52	12.1	0.6	2.8	7.8		8.3		9.1		11.7		12.2		13.1	
2**	1.5	7 / 0.52	12.1	0.6	2.8	9.4	12.8	14.4	15.9	16.2	17.4	13.3	16.9	18.8	20.6	20.9	22.5
3	1.5	7 / 0.52	12.1	0.6	2.8	13.0	13.6	15.3	15.9	17.2	18.8	17.1	17.7	19.9	20.6	21.9	23.9
4	1.5	7 / 0.52	12.1	0.6	2.8	14.4	14.9	16.7	17.4	18.9	20.5	18.8	19.3	21.2	22.4	23.6	26.0
5	1.5	7 / 0.52	12.1	0.6	2.8	15.7	16.3	18.5	19.4	21.0	23.0	20.3	20.9	23.5	24.4	26.0	28.8
6	1.5	7 / 0.52	12.1	0.6	2.8	17.1	18.0	20.2	21.1	22.9	25.4	22.0	22.9	25.5	26.5	28.3	31.7
7	1.5	7 / 0.52	12.1	0.6	2.8	17.1	18.0	20.2	21.1	22.9	25.4	22.0	22.9	25.5	26.5	28.3	31.7
8	1.5	7 / 0.52	12.1	0.6	2.8	19.4	20.2	23.0	24.1			24.4	25.6	28.8	30.3		
9	1.5	7 / 0.52	12.1	0.6	2.8	21.0	22.3	25.3	26.5			26.4	28.1	31.5	32.7		
12	1.5	7 / 0.52	12.1	0.6	2.8	23.1	24.0	27.3	29.0			28.9	30.2	33.5	35.0		
19	1.5	7 / 0.52	12.1	0.6	2.8	27.4	28.9	32.7	34.2			33.5	35.4	39.3	41.3		
24	1.5	7 / 0.52	12.1	0.6	2.8	32.8	34.1					39.3	41.0				
37	1.5	7 / 0.52	12.1	0.6	2.8	37.7	39.2					44.7	46.6				

\* The rated outer diameter of cables may vary by +/- 20 % depending on the options selected.

\*\* The two pairs with general electrical screen (EG) are twisted like a quad cable.

For this product, please contact:



**SEVI KABEL**

VIA DEI MARINAI D'ITALIA, 1 - 10034 CHIVASSO (TO) - Tel. 011.910.11.12 / 011.910.67.78 - Fax 011.913.13.13 - info@sevikabel.it